

DELIMBE

Abbaye de Bonport – 27340 PONT DE L'ARCHE

☎ **02.35.23.27.62** – Fax 02.35.23.27.78

contact@delimbe.com

GAME/PREY FEEDER CEREALS DISTRIBUTOR



We thank you for choosing this air seeder to which we have given the constant concern of quality to offer you a product of the highest order. In order to make the most of your DELIMBE seed drill we invite you to read carefully all the indications mentioned in this leaflet.

TECHNICAL NOTICE

TECHNICAL FEATURES:

Steel frame painted in baked epoxy, polyethylene tank.

- Tank capacity: 70 or 120 liters depending on model.
- Supply voltage: 12 Volts- 180 Watts- Fuse 30 Amps.

INSTALLATION-MOUNTING:

- Attach the Stapler to the vehicle.
- A self-propelled hitch (hitch on the car ball) can be provided as an option.
- Stapler can be placed either in the middle (on a hitch), or on the side of the vehicle.
- A control box is provided with the unit.
- Connect the Stapler to either the 3 pin socket or the cigarette lighter.
- **CAUTION: ROTATE THE MOTOR IN A FLECHE DIRECTION COUNTER-CLOCKWISE**
- **WATCH, RED WIRE AT MOST, BLACK GROUND WIRE.**
- Now that the motor is running, adjust.
- *Example:* Open the butterfly screw to about half and adjust the speed of the vehicle. If the flow rate is too high or not enough, correct it using the butterfly screw hatch.

EMPTYING: A front hatch is provided on the base of the hopper.

STORAGE: in the shelter.

The stapler is equipped with a movable turbine, it is possible to orient the projection of the seed to 360°. The projection is done in a grouped jet, so it is possible to project in the desired place. This allows driving on the way to send everything into the forest on a width of 15 meters on one side.

SAFETY RULES:


- After securing the DELIMBE Stapler, check the rigidity of the assembly.
- When mounting, the installer must ensure a means of access to the hopper.
- To prevent possible accidents, wear respiratory protection when filling the hopper and using the device, as well as clothing suitable for the products.

DEBIT CALCULATION:

The adjustment table is given in flow/minute: MAIZE AND CEREAL

<i>Opening the hatch</i>	<i>Flow rate in Kg/min</i>
1/4	2.30 Kg/min
1/2	6.00 Kg/min
3/4	18.00 Kg/min
4/4	36.00 Kg/min

SCHEMA – PHOTO DELIMBE CEREAL DISTRIBUTOR

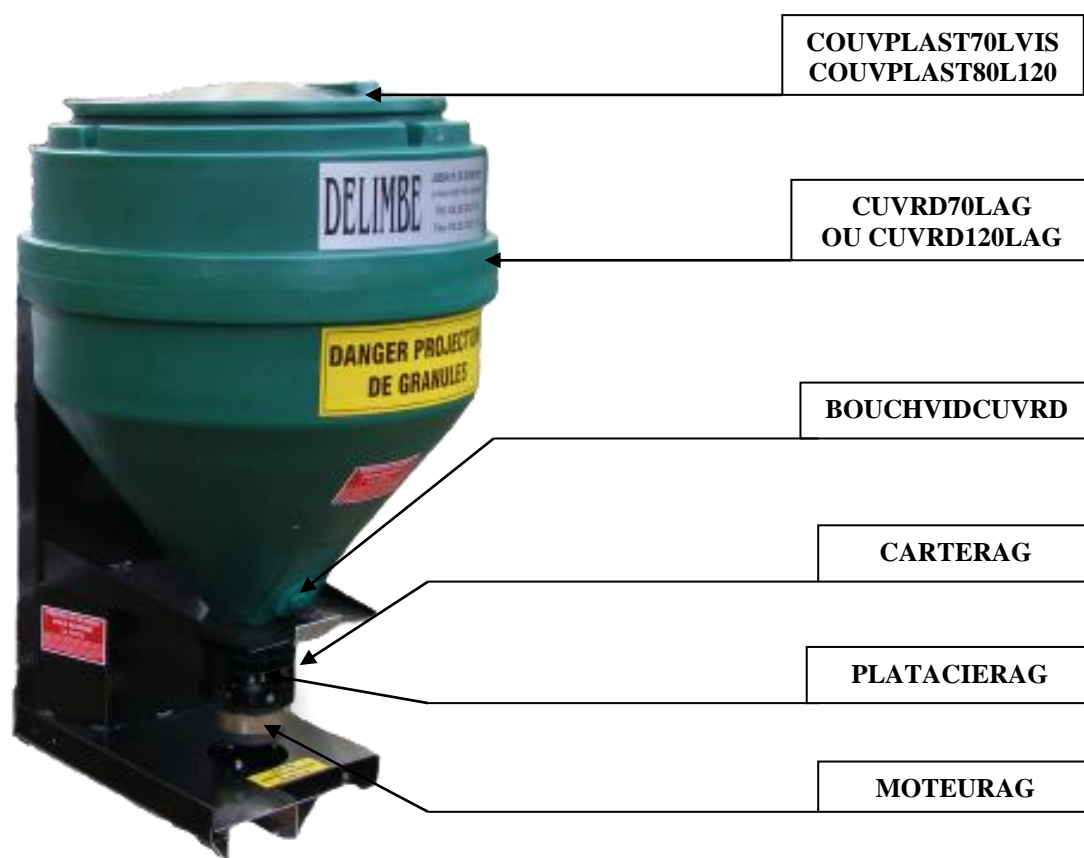

REFERENCE	DESIGNATION
COUVPLAST70LVIS COUVPLAST80L120	COVER 70L COVER 120L
CUVRD70LAG CUVRD120LAG	TANK 70 LITRES TANK 120 LITRES
BOUCHVIDCUVRD	DRAIN PLUG TO BE INSERTED
CARTERAG	CRANKCASE
PLATACIERAG	DISC
MOTAGRAINOR	STAPLER MOTOR

DECLARATION CE DE CONFORMITE

Le constructeur : DELIMBE F-27340 Pont de l'Arche

Déclare que le matériel neuf : AGRAINOIR MOBILE

*Est conforme aux exigences essentielles de sécurité mentionnées dans la
Directive Européenne 2006/42 CE par application des normes harmonisées*

Fait à Pont de l'Arche le : 01/01/2006